




Jeunes filles au piano - Museo d'Orsay, Parigi
Pierre-Auguste Renoir, 1822

RENOIR

sporgenza max | **max projection** | maximale Ausladung
avancée maximale | salida máx | saliência máxima

350 cm

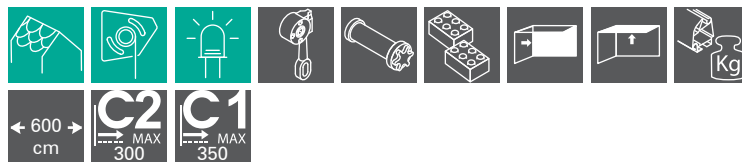

AVAILABLE COLOURS

RAL

9010

7035

1013





RENOIR

euroflex A TOUCH OF SHADE

Tenda a bracci su staffe indipendenti con supporto rullo regolabile. dimensioni massime modulo singolo 600 x 350 cm.

Folding arm awning on independent brackets with adjustable roller tube support. Single module maximum dimensions: 600 cm width and 350 cm projection.

Gelenkarmmarkise auf unabhängige Armträger mit einstellbarem Tuchwellenträger. Maximalgröße je einziges Modul: Breite 600 cm; Ausladung 350 cm.

Store à bras sur étriers indépendants avec support tube enrouleur réglable. Dimensions maximales du module simple: largeur 600 cm et avancée 350 cm.

Toldo con brazos sobre soportes independientes y soporte brazo con posiciones lateral e intermedia. Dimensiones máximas módulo individual: ancho 600 cm y salida 350 cm.

Toldo com braços sobre estribos independentes com suporte braço com posicionamento lateral e intermédio. Dimensões máximas modulo singular: largura 600 cm e saliência 350 cm.



arm support



roller tube support



heavy lux terminal bar



PVC heavy terminal bar cap

AWNING MINIMUM WIDTH

sporgenza braccio
arm projection
Arm Ausladung
avancée du bras
salida brazo
saliência braço

larghezza tenda minima » 1 coppia bracci
awning minimum width » 1 pair of arms
Mindestbreite » 1 Paar von Armen
largeur minimum store » 1 paire de bras
ancho mínimo toldo » 1 par de brazos
largura mínima de toldo com um par de braços

150	196 cm
175	220 cm
200	244 cm
225	269 cm
250	296 cm
275	320 cm
300	344 cm
325	369 cm
350	396 cm


WIND RESISTANCE CLASS ACCORDING TO THE EUROPEAN STANDARD UNI EN 13561

Classe di resistenza al vento secondo la normativa europea UNI EN 13561
Wind resistance class according to the European standard UNI EN 13561
Windwiderstandsklasse nach der Europäischen Norm EN 13561

Classe de résistance au vent conformément à la réglementation européenne UNI EN 13561
Clase de resistencia al viento según la Normativa Europea UNI EN 13561
Clase de resistência ao vento de acordo com as normas europeias UNI EN 13561

larghezza width Breite largeur ancho largura	sporgenza tenda aperta open awning projection Ausladung geöffnete Markise avancée store ouvert salida toldo abierto saliência toldo aberto	classe class Klasse classe clase classe	tubo avvolgitore roller tube Tuchwelle tube enrouleur tubo de enrollle tubo enrolador
600 cm	350 cm	1	Ø 78 mm
600 cm	300 cm	2	Ø 78 mm

ARM LENGTH AND INCLINATION

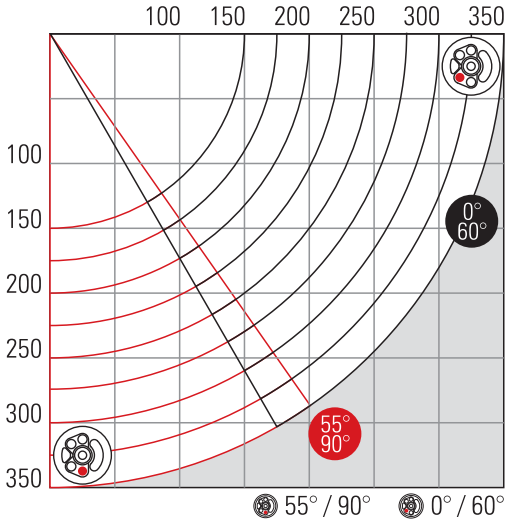

CONTINUOUS ADJUSTMENT

0° - 90°

regolazione continua
cambiando la posizione del disco
continuous adjustment
changing disk's position
Kontinuierliche Einstellung
wobei die Position der Scheibe geändert wird
réglage en continue
en changeant la position du disque
ajuste continuo
de mudando a posição do disco
ajuste continuo
cambiando la posición del disco

MAIN ARM

GALAXY PLUS

SP. MAX


350 cm

OPTIONAL ARM


SP. MAX

ARIES PLUS	350 cm
STAR PLUS	350 cm
STAR	350 cm
ARIES	350 cm
PEGASUS PLUS	350 cm
PEGASUS	350 cm
CASSIOPEA	350 cm
CASSIOPEA LED	350 cm

WALL/CEILING BRACKET

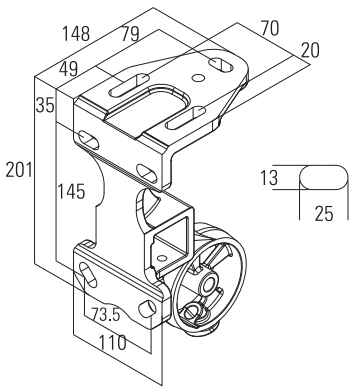

AWNING SIZES

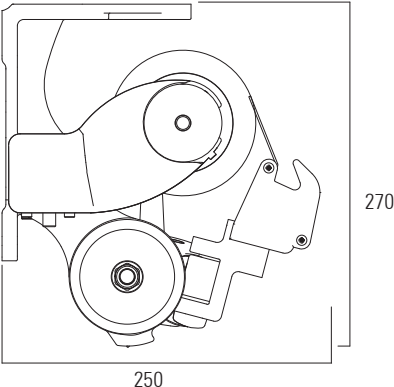

HOOD



ROLLÒ



LED SYSTEM

